



Partial C.I.P Top Concrete Coping Elevation

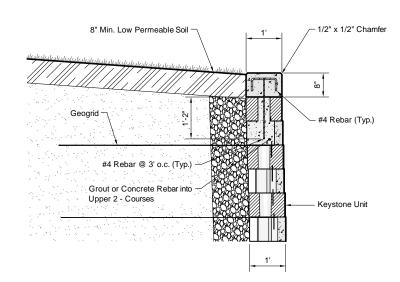

Note:

- 1. Maintain 2" minimum cover on all rebar.
- 2. Full expansion joints shall be placed every 3rd joint and at all wall radius and bend points.

Section D - D C.I.P. Top Concrete Coping

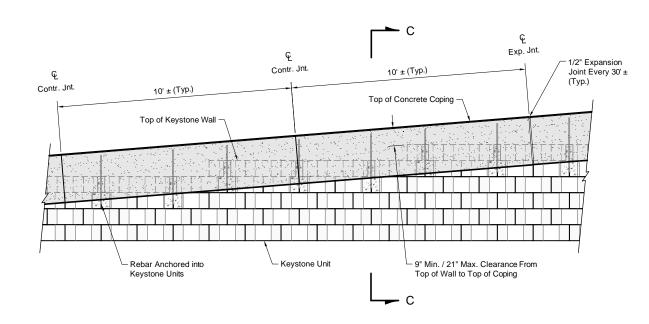


Partial C.I.P Concrete Coping Elevation

Copyright 2003 Keystone Retaining Wall Systems

stability, including but not limited to foundation and slope stability is the responsibility of the Owner. The design is based on the assumption that the materials within the retained mass, methods of construction, and quality of materials conform to KEYSTONE's specification for this project.

This drawing is being furnished for this specific project only. Any party accepting this document does so in confidence and agrees that it shall not be duplicated in whole or in part, nor disclosed to others without the consent of Keystone Retaining Wall Systems, Inc.





4444 W 78th Street Minneapolis, MN 55435 952-897-1040

8" Min. Low Permeable Soil	1'-4"	-1/2" x 1/2" Chamfer		
		9" Min. 21" Max.		
Geogrid —		#4 Rebar (Typ.)	Varies	2
#4 Rebar @ 3' o.c. (Typ.)  Grout or Concrete Rebar into Upper 2 - Courses		4"  Keystone Unit		
um cover on all rehar	1'			

Note: 1. Maintain 2" minimum cover on all rebar.

2. Full expansion joints shall be placed every 3rd joint and at all wall radius and bend points.

3. Insure that all top of wall steps are completely

covered by overhang of concrete coping (3" min.).

Section C - C C.I.P. Concrete Coping

Designed By: Cast in Place Coping Details RKM Checked By: Project No: CDM Keystone Retaining Wall Systems Scale: Drawing No: Typical Wall Details No Scale