


# KEYSTONE KEYSYSTEM™ III

Evaluated  
to meet  
**AASHTO  
FHWA and IDEA**  
Requirements.

The Keystone KeySystem III has been developed, designed and tested to meet the highest standards of the transportation market. The system utilizes the patented Keystone Compac III unit and NTPEP evaluated Tencate Mirafi Miragrid® XT geogrids. The System has been tested in accordance with the most current AASHTO LRFD Bridge Design Specifications, Federal Highway Administration sustained load connection requirements for transportation applications and ASCE Geo-Institute IDEA Evaluated.

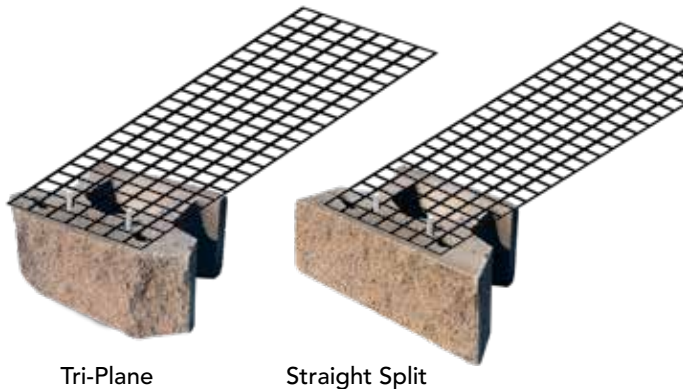

Tri-Plane

Straight Split

Face Area • 1 sq. ft. per unit  
8" h x 18" w x 12" d  
(203 x 457 x 305 mm)  
67 - 76 lbs (30 - 34 kg)

2 Connection Pins  
required per unit



KeySystem II is still available in some markets. It will be updated to III in the future when appropriate with each DOT.

Alternative face options available:

Victorian



Regency



4444 West 78th Street  
Minneapolis, MN 55435  
800-747-8971 • 952-897-1040  
www.keystonewalls.com